


INFORMATION

XPEL **HEADLIGHT** Protection Film is a self adhesive, tinted polyurethane film engineered to protect automotive headlights from harmful effects of stone chips, abrasions and discoloring. This product is formulated with a high performance acrylic adhesive which bonds well to a variety of surfaces. XPEL **HEADLIGHT** Protection Film is designed to resist staining and offers superior environmental resistance.

PRODUCT CONSTRUCTION

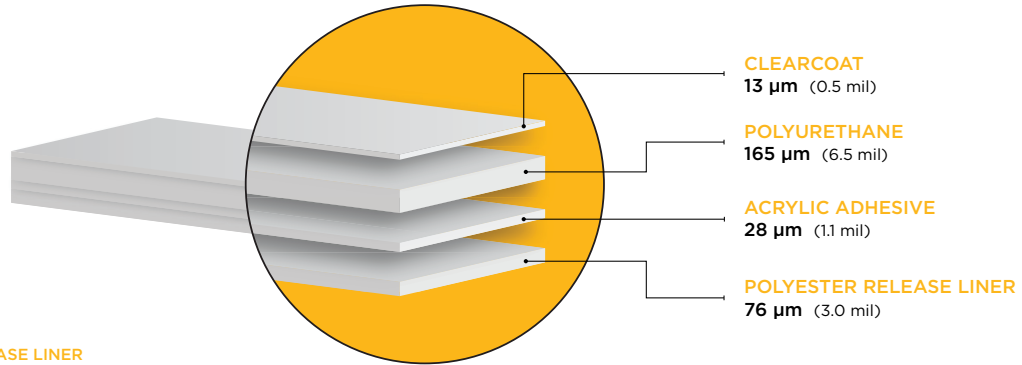

NOMINAL THICKNESS W/O RELEASE LINER
205 µm (8.1mil) +/- 10%

GENERAL CHARACTERISTICS

PROPERTIES	TYPICAL VALUES	UNIT OF MEASURE	TEST METHOD
Physical			
Clearcoat	0.5	mils ± 5%	etQS005 (micrometer)
Film	6.5		
Adhesive	1.1		
Liner	3.0		
Visible Light Transmission	25%	± 2.5%	TC1800 Tint-Chek Meter
Peel Adhesion			
15 minute	> 30	oz/in	PSTC-1 90 degree
24 hour	> 50		

RECOMMENDED SHELF LIFE - 2 years from date of purchase*
*if installing film after recommended shelf-life, re-certification by XPEL is required.

RECOMMENDED STORAGE CONDITIONS
72° F (22°C) @ 50% RH



TARGET APPLICATION
Headlight Protection & Styling



TYPICAL INDUSTRY SECTORS
Automotive, motorcycle, RV and powersports

Notice: Notice: The representations of performance and suitability for use contained in this Technical Data Sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use. This product has 25% VLT and is not DOT approved. For off-road use only.