


**INFORMATION**

XPEL TRACWRAP™ Protection Film is a self adhesive, polyurethane film designed to protect automotive paint, and other surfaces, from harmful effects of stone chips and abrasion. This product is formulated with an embossed acrylic adhesive which can be applied to surfaces without the need for an installation aide.

**PRODUCT CONSTRUCTION**

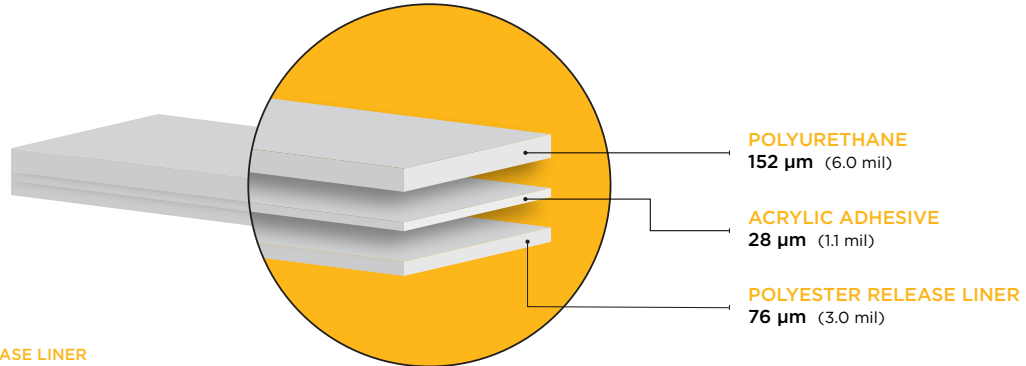

**NOMINAL THICKNESS W/O RELEASE LINER**  
180 µm (7.10mil) +/- 10%

**GENERAL CHARACTERISTICS**

PROPERTIES	TYPICAL VALUES	UNIT OF MEASURE	TEST METHOD
Physical Film Adhesive Liner	6 1.31 3	mil ± 5%	etQS005 (micrometer)
Peel Adhesion 15 minute 24 hour	> 30 > 50	oz/in	PSTC-1 90 degree

**RECOMMENDED SHELF LIFE** - 2 years from date of purchase\*  
\*if installing film after recommended shelf-life, re-certification by XPEL is required.

**RECOMMENDED STORAGE CONDITIONS**  
72° F (22°C) @ 50% RH



**Notice:** The representations of performance and suitability for use contained in this Technical Data Sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use.